




CHONGQING CHANGJIA


TEL: +86 023 6841 7490
MOB: +86 187 1626 7125
EMAIL: info@changjia.com

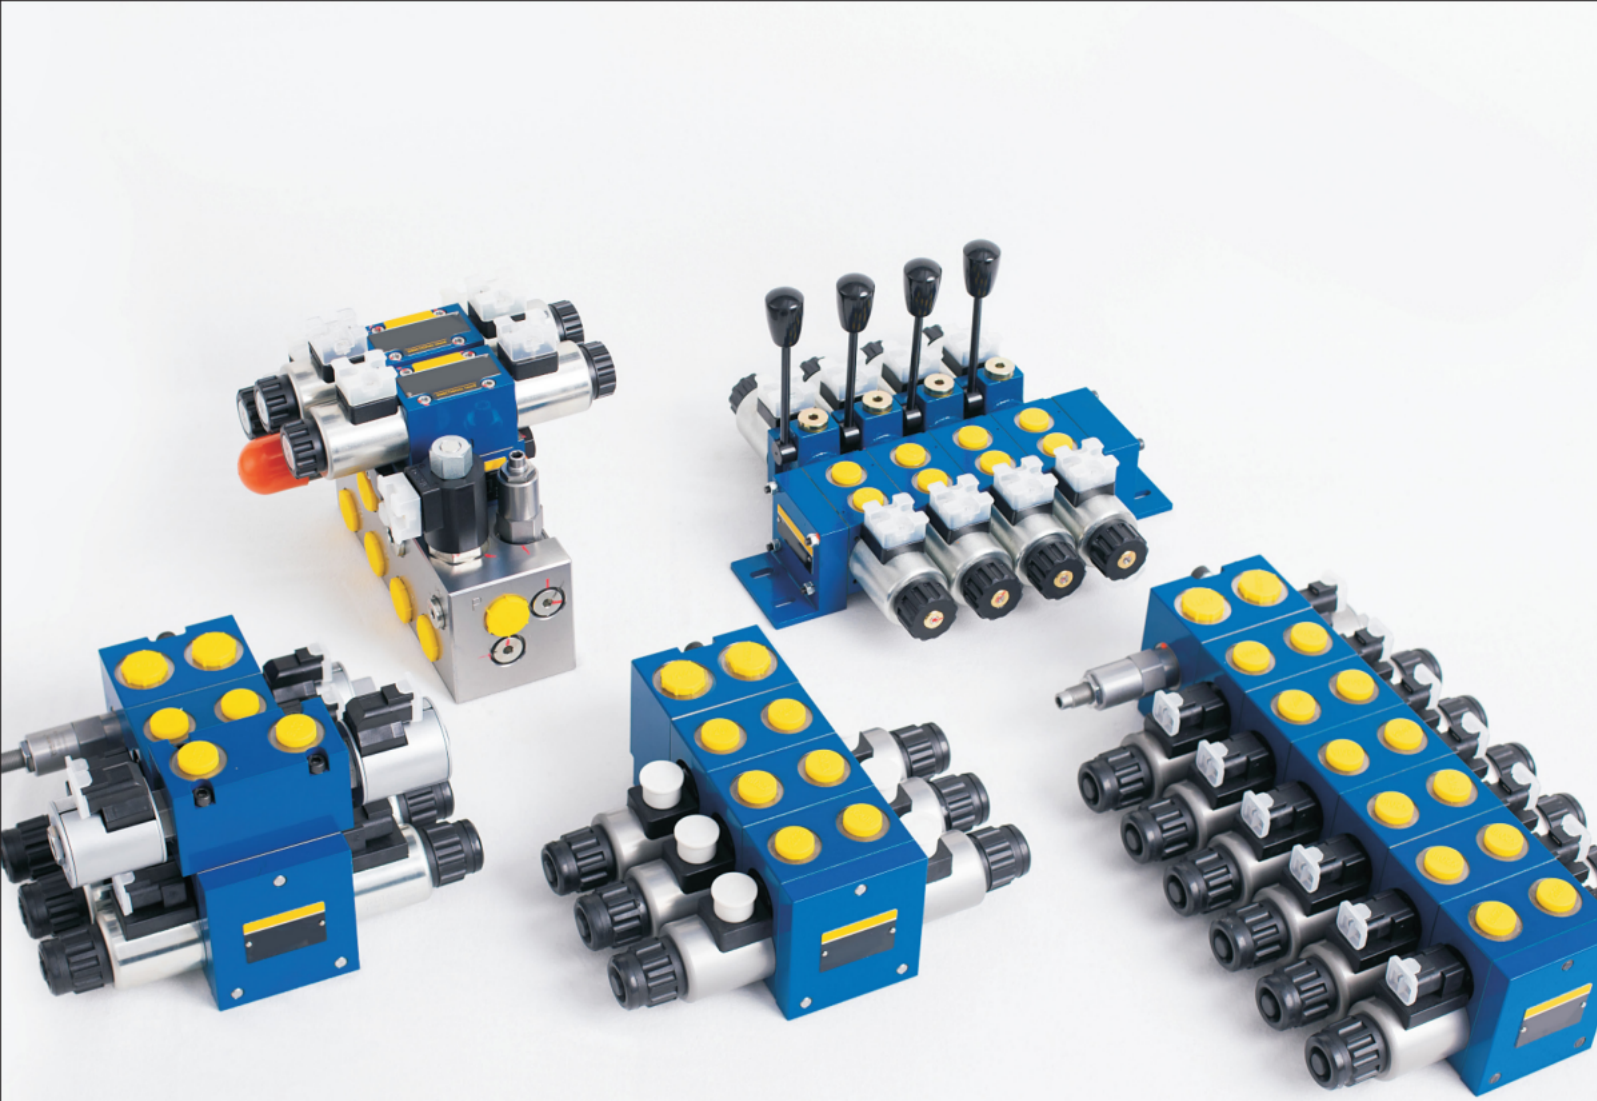

**HYDRAULIC SPARE
PARTS CATALOGUE**




Whatsapp No



Wechat No

CHONGQING CHANGJIA

Hydraulic gear pump

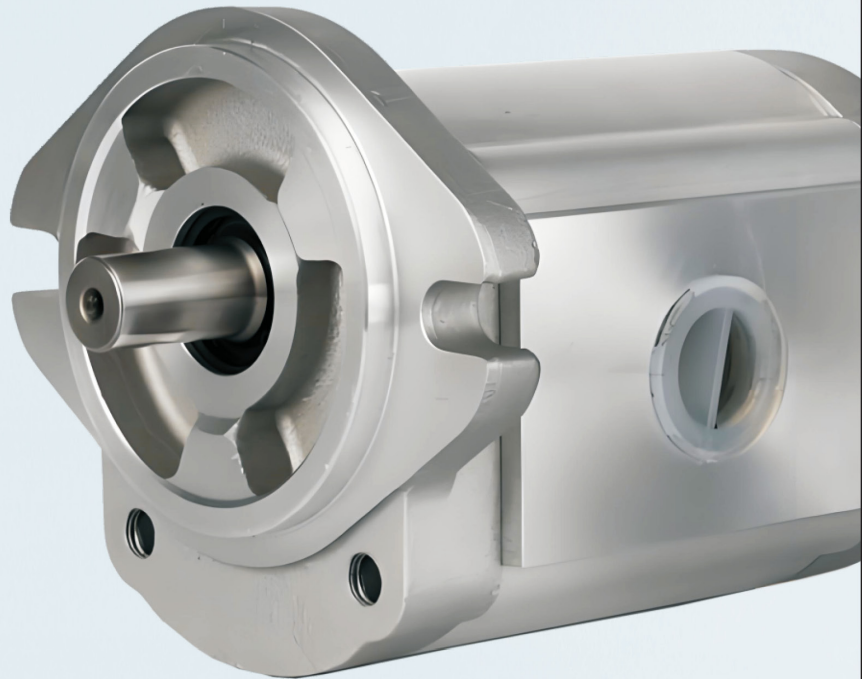

Application:
Widely used on agricultural machinery :
MF, FIAT, DEUTZ, FORD, etc.



Hydraulic gear pump

S/N	OE REF NO	APPLICATION	PICTURE	S/N	OE REF NO	APPLICATION	PICTURE
1	KP0588CG55 37150-36100 34150-36103	KUBOTA		16	83960261/E4NN3K514AA	FORD	
2	KP0588CGSS	KUBOTA		17	FIAT A25	FIAT	
3	KP0588 CHSS	KUBOTA		18	FIAT C25	FIAT	
4	KP0588 CJSS(5J1CW)	KUBOTA		19	A42XP4MSS	FIAT	
5	05106 15333	DEUTZ		20	A42	FIAT	
6	CB-1016L/225	KUBOTA		21		MF385	
7	KP0588CJSS(5J1CW) 20925580 Spline key	JCB		22	F000510502/052107T1	MF 471, 481, 491, 492	
8	20912800 Flat key	JCB		23	FIAT A42	FIAT	
9		KOMATSU		24	5179722 C25	FIAT	
10	CB-1620R/366	DEUTZ		25	5129478 A25	FIAT	
11	87759440/E6NN3K514EA	FORD 2000/3000/4600/5000		25	5129483 A33	FIAT	
12	3774616M92/1696665M91	MF362 365 375		26	23532981	DETROIT DIESEL S60	
13	3774617M91/311537093/1	MF 897147 M92		27	A12.5L 29926 20/205200	JCB	
14	3774617M91/311537093/1	MF 897147 M92		28	A4570910501	BENZ	
15	E6NN3K514AB	FORD 5610, 6610, 7610		29	A004 0910 501	BENZ	

Hydraulic gear pump

S/N	OE REF NO	APPLICATION	PICTURE
30	A8.2L 19900 20/201800	JCB	
31	0012631U91/5L7.5CD03R	MF	
32	9.510.080.750	VALTRA TRACTOR	
33	41794503	VALTRA TRACTOR	
34	9.510.080.760	VALTRA TRACTOR	
35	81131100	WALTRA TRACTOR	
36	9.510.080.758	VALTRA TRACTOR	
37	E6NN3K514A99M	FORD E6NN3K514PA/514EA	
38	3148760M91/BOSCH 9540082507	MF 65R 265 275 285 290 80X 95X	
39	1518142	SCANIA	
40	KUBOTA	KUBOTA	
41	770013742	RENAULT	
42	81.06650.6025/81.06650.6 003	MAN	
43	5180273	DUETZ	
44	HP 20C11X542	DUETZ	

S/N	OE REF NO	APPLICATION	PICTURE
45	2TR19DVR20U2 FB	FIAT	
46	2TR16DVR19U1FP	FIAT	
47	523090M91	MF	
48	523089M91/853091M91/3 08078X91	MF	
49	523092M91	MF	
50		KOMATSU	
51		KOMATSU	
52	3C301-82200	KOMATSU	
53	504140125	FIAT IVECO	
54	3C301-82202/3C081- 82200	KOMATSU	
55	3A272-82200/3C001- 82202 15 Teeth	KOMATSU M7040	
56		KOMATSU M6040	
57	Foton CBN-314	FOTON	
58		OTHER	
59	MF 311537091M	MF	

Hydraulic gear pump


S/N	OE REF NO	APPLICATION	PICTURE
60	3115.370.91M	MF	
61		KOMATSU	
62	KDP-2-D22	FIAT	
63			
64	D8NN600KB	FORD	
65		KOMATSU	
66	CB-F11+8L/1089	MF	
67	3774614M91	MF	
68	83936586	FORD	
69	1517 222 362 0510 565 325	BOSCH	
70	F000510606 EONN600AC	TRATOR FORD 6610	
71	RE241578	John Deere 1054 1204 1354 1404 6603 6068 6403 904 Tractor	
72	SJ21032	John Deere	
73	3790722M1	MF	
74	0610 765 625 1917 333 362		

S/N	OE REF NO	APPLICATION	PICTURE
75	UTB H8.01	UTB 650	
76	RE73947	John Deer	
77	RE223233	John Deer	
78	F0NN600BB/R979001425	FORD NEW HOLLAND 7830/TS100/TS110/TS120	
79	D8NN600LB/F000510714	FORD NEW HOLLAND 4600/4610/4630/5030	
80		KOMATSU	
81	332/F9031	JCB	
82	DONN600F		
83	3597420M91		
84	3597420M91		

Hydraulic piston pump



A11V(L)O Open shaft variable displacement pump



Rated working pressure	350bar
Maximum working pressure	400bar
Displacement specifications	60、75、95、115、130、145、190、215、260、280ml/r
Variable method	LRDS、LRDU、DR、HD、EP
Main application areas	Engineering vehicles, piling machinery, sanitation machinery, agricultural machinery, coal machinery, special machinery

A10V(S)O Open shaft variable displacement pump



Rated working pressure	250bar
Maximum working pressure	280bar
Displacement specifications	18、28、45、71、100、140ml/r
Variable method	DR、DG、DFR、DFLR、ED
Main application areas	Engineering vehicles, sanitation machinery, agricultural machinery, coal machinery, special machinery

A2F oblique axis quantitative motor



Rated working pressure	320bar
Maximum working pressure	350bar
Displacement specifications	10、12、23、28、45、55、63、80、107、125、160、200、250、355、500ml/r
Product features	High performance rotary assemblies with proven spherical oil distribution trays have the advantages of automatic alignment, low circular speed, high efficiency, durable ball and roller bearings for long service life, and the drive shaft can withstand radial loads
Main application areas	Engineering vehicles, agricultural machinery, coal machinery, special machinery

A6V oblique axis variable motor





Rated working pressure	320bar
Maximum working pressure	350bar
Displacement specifications	28、55、80、107、160、225、250、500ml/r
Variable method	HD、HZ、HA、EP、EZ、MA
Product features	In hydrostatic transmission, the adjustment range is large, secondary control and adjustment with various control devices, the maximum output speed is increased under small inclination Angle, high power density, high efficiency, excellent starting characteristics, and small inertia
Main application areas	Engineering vehicles, agricultural machinery, coal machinery, special machinery

A7V oblique axis variable pump



Rated working pressure	315bar
Maximum working pressure	350bar
Displacement specifications	20、28、40、55、58、80、78、107、117、160、250、500ml/r
Variable method	LV、DR、EP、ES、HD、HS、MA、SC、NC
Product features	Compact structure, drive shaft can withstand radial load, long life, low noise
Main application areas	Construction machinery, mining metallurgy, machine tools, ships, light industry, military industry

A2FM oblique axis quantitative motor		
	Rated working pressure	400bar
	Maximum working pressure	450bar
	Displacement specifications	10、12、16、28、32、45、56、63、80、90、107、125、160、180、355ml/r
	Variable method	
	Product features	The output flow is proportional to the driving speed and displacement; The drive bearing design is suitable for long working time, extending the working life; A wide range of specifications to match any drive equipment; Compact structure, excellent power/weight ratio, optimal volumetric efficiency; Integrated axial tapered plunger design with plunger ring.
	Main application areas	It is suitable for hydraulic transmission in open or closed circuit, walking machinery, engineering vehicles, agricultural machinery, coal machinery, special machinery and other industrial fields

A2FE detachable oblique axis quantitative motor		
	Rated working pressure	400bar
	Maximum working pressure	450bar
	Displacement specifications	28、32、45、56、63、80、90、107、125、160、180ml/r
	Variable method	/
	Product features	Preferentially installed in the reducer drive and designed; The mounting flange of the motor is designed in the middle of the motor housing, allowing the motor and the reducer to be mounted together, and a wide range of specifications to match any drive equipment; Compact structure, excellent power/weight ratio, optimal volumetric efficiency; Integrated axial tapered plunger design with plunger ring.
	Main application areas	It is suitable for hydraulic transmission in open or closed circuit, walking machinery, engineering vehicles, agricultural machinery, coal machinery, special machinery and other industrial fields

A6VM oblique axis variable motor		
	Rated working pressure	400bar
	Maximum working pressure	450bar
	Displacement specifications	55、80、107、115、160、200、215、250ml/r
	Variable method	HD、HZ、EP、EZ、HA、MA
	Product features	Inclined shaft structure, cone plunger strong impact resistance, with speed sensor, flushing valve and other accessories
	Main application areas	Engineering vehicles, agricultural machinery, coal machinery, special machinery

A6VE plug-in oblique axis variable motor		
	Rated working pressure	400bar
	Maximum working pressure	450bar
	Displacement specifications	55、80、107、160ml/r
	Variable method	HD、HZ、EP、EZ、HA、MA
	Product features	Inclined shaft structure, cone plunger strong impact resistance, with speed sensor, flushing valve and other accessories
	Main application areas	Engineering vehicles, agricultural machinery, coal machinery, special machinery

Hydraulic cylinder



Hydraulic valve



多路换向阀 Hydraulic directional valve



电磁阀 Solenoid valve

